




FRAISES

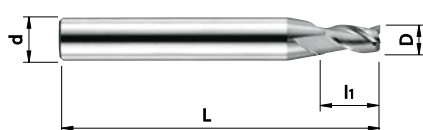
Fraises

Fräser

End mills

Frese

2	2	0	1	3	2	3	0	G	220.132.30	220.132.30G
MD HM/SC MG KUF12	Fraises Fräser End mills Frese							AlCrON		



OPTI
star



Type N
Norme OPTI

D _{h10}	d _{h6}	l ₁	L	Z	Non revêtu	Revêtu AlCrON
1	6	3	44	3	220.132.30-01	220.132.30G-01
1.5	6	4	44	3	220.132.30-01.5	220.132.30G-01.5
2	6	4	44	3	220.132.30-02	220.132.30G-02
2.5	6	5	44	3	220.132.30-02.5	220.132.30G-02.5
3	6	5	44	3	220.132.30-03	220.132.30G-03
4	6	7	44	3	220.132.30-04	220.132.30G-04
5 *	6	8	44	3	220.132.30-05	220.132.30G-05
6	6	10	44	3	220.132.30-06	220.132.30G-06
8	8	12	44	3	220.132.30-08	220.132.30G-08
10	10	14	50	3	220.132.30-10	220.132.30G-10

* Livrable avec revêtement TiAlN N jusqu'à épuisement du stock

Méplat Weldon selon DIN 6535HB sur demande

INEO
Tech
>>> p 143