





FRAISES

Fraises

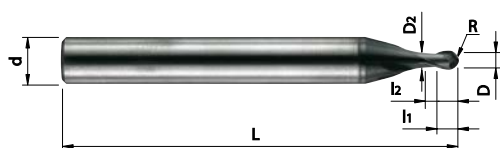
Fräser

End mills

Frese

2	2	0	2	2	3	3	0	X
MD HM/SC MG KX10	Fraises Fräser End mills Frese							TiAlN X

220.223.30X



OPTI
cut



Type N
Norme OPTI

D _{e8}	R _{e8}	l ₁	D ₂	l ₂	d _{h6}	L	Z	Revêtu TiAlN X
1	0.5	1	0.95	2.5	6	50	2	220.223.30X-01
1.2	0.6	1.2	1.15	3	6	50	2	220.223.30X-01.2
1.4	0.7	1.4	1.35	3.5	6	50	2	220.223.30X-01.4
1.5	0.75	1.5	1.45	3.8	6	50	2	220.223.30X-01.5
1.6	0.8	1.6	1.55	4	6	50	2	220.223.30X-01.6
1.8	0.9	1.8	1.75	4.5	6	50	2	220.223.30X-01.8
2	1	2	1.95	5	6	50	2	220.223.30X-02
2.5	1.25	2.5	2.4	5	6	50	2	220.223.30X-02.5
3	1.5	3	2.85	6	6	50	2	220.223.30X-03
4	2	4	3.85	6	6	50	2	220.223.30X-04

INEO
Tech
>>> p 146