

FRAISES


Fraises

Fräser

End mills

Frese

2	2	0	2	2	1	3	0	G	220.221.30	220.221.30G
MD HM/SC MG KX10	Fraises Fräser End mills Frese					$\lambda 30^\circ$ $\gamma \sim 10^\circ$		AlCrON		

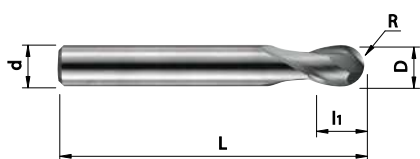

OPTI
cut



Type W
Din 6527K

D _{e8}	R _{e8}	d _{h6}	l ₁	L	Z	Non revêtu	Revêtu AlCrON
2	1	6	4	50	2	220.221.30-02	220.221.30G-02
3	1.5	6	4	50	2	220.221.30-03	220.221.30G-03
4	2	6	5	54	2	220.221.30-04	220.221.30G-04
5	2.5	6	6	54	2	220.221.30-05	220.221.30G-05
6	3	6	7	54	2	220.221.30-06	220.221.30G-06
8	4	8	9	58	2	220.221.30-08	220.221.30G-08
10	5	10	11	66	2	220.221.30-10	220.221.30G-10
12	6	12	12	73	2	220.221.30-12	220.221.30G-12

Livable avec revêtement TiAlN X jusqu'à épuisement du stock

INEO
Tech
>>> p 146




FRAISES

Fraises


Fräser

End mills

Frese

2	2	0	2	2	3	3	0	X
MD HM/SC MG KX10	Fraises Fräser End mills Frese					$\lambda 30^\circ$ $\gamma \sim 10^\circ$		TiAlN X

220.223.30X

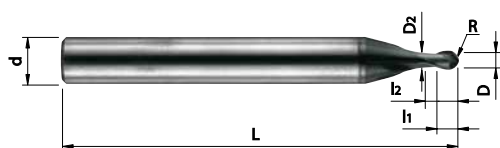

OPTI
cut



Type N
Norme OPTI

D_{e8}	R_{e8}	l_1	D_2	l_2	d_{h6}	L	Z	Revêtu TiAlN X
1	0.5	1	0.95	2.5	6	50	2	220.223.30X-01
1.2	0.6	1.2	1.15	3	6	50	2	220.223.30X-01.2
1.4	0.7	1.4	1.35	3.5	6	50	2	220.223.30X-01.4
1.5	0.75	1.5	1.45	3.8	6	50	2	220.223.30X-01.5
1.6	0.8	1.6	1.55	4	6	50	2	220.223.30X-01.6
1.8	0.9	1.8	1.75	4.5	6	50	2	220.223.30X-01.8
2	1	2	1.95	5	6	50	2	220.223.30X-02
2.5	1.25	2.5	2.4	5	6	50	2	220.223.30X-02.5
3	1.5	3	2.85	6	6	50	2	220.223.30X-03
4	2	4	3.85	6	6	50	2	220.223.30X-04

INEO
Tech
>>> p 146

FRAISES


Fraises

Fräser

End mills

Frese

2	2	1	2	3	4	3	0	G	221.234.30	221.234.30G
MD HM/SC MG KX10	Fraises Fräser End mills Frese	DIN 6535HB		Z3		$\lambda 35^\circ$ $\gamma \sim 10^\circ$		AlCrON		

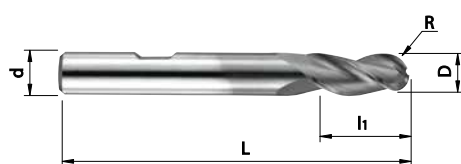

OPTI
cut



Type N
DIN 6527L

D _{e8}	R _{e8}	d _{h6}	l ₁	L	Z	Non revêtu	Revêtu AlCrON
3	1.5	6	7	57	3	221.234.30-03	221.234.30G-03
4	2	6	8	57	3	221.234.30-04	221.234.30G-04
5	2.5	6	10	57	3	221.234.30-05	221.234.30G-05
6	3	6	10	57	3	221.234.30-06	221.234.30G-06
8	4	8	16	63	3	221.234.30-08	221.234.30G-08
10	5	10	19	72	3	221.234.30-10	221.234.30G-10
12	6	12	22	83	3	221.234.30-12	221.234.30G-12
14 *	7	14	22	83	3	221.234.30-14	221.234.30G-14
16 *	8	16	26	92	3	221.234.30-16	221.234.30G-16
18 *	9	18	26	92	3	221.234.30-18	221.234.30G-18
20 *	10	20	32	104	3	221.234.30-20	221.234.30G-20

* Dimensions livrables jusqu'à épuisement du stock

INEO
Tech
>>> p 146